

The Click System

Application

When floors in flats, houses, basements or patios are renovated, comfort floor heating can be added without using screed or without breaking up the old floor.

The comfort is provided by the Devidry™ Click system which is designed to be in contact with wooden sub or top floorings.

The flooring can be parquets and laminates up to 22 mm, and even carpets with Devidry™ Plug Kit.

With Devidry™ Pro Kit you get access to DEVI's digital Devireg™ 535 timer thermostat and save energy while still having the perfect heating comfort.

Devidry™ - The Click System

Devidry™ Click system

- consists of a 8 mm pile providing an underlay with multiple properties
- is installed on the old floor or sub floor, right under the new top floor
- ensures fast responding floor heating and evenly distributed floor heat

The result is an all-in-one heating element and underlay for wooden floorings, laminates and carpets.

Each of the layer have different properties

1. Rubber Pile – pressure distribution
2. Connection – fast, sturdy and water proof IPX7
3. Cables – providing 55 W/m² or 100 W/m²
4. Polyester Foil – reinforcing
5. Aluminium Foil – heat distribution
6. PP-Foam – sound reducing and insulating

Product Features

Easy installation
Fast responding floor heat
Even heat distribution
17 dB sound reduction
Low building height 8 mm
No use of screed.
Removable
5-year warranty

Standard compliance

IEC 60335-2-96
(with Devidry™ Pro Kit)

IEC 60335-2-106
(with Devidry™ Plug Kit)

Certificate
KEMA


Technical details

Height	8 mm
Mains voltage	230 V (50 Hz)
Max. Amps per Devidry™ System	10A
IP rating for Devidry™ Element	IP X7
Output	55 W/m ² on wooden subfloors 100 W/m ² on concrete subfloors
Sound reduction value	17 db
Insulation value (U-value)	8 W/m ² K

Devidry™ elements		Heated area	Net output
89300000	Devidry 55, 1 m ²	0,4 m ²	22 W
89300002	Devidry 55, 2 m ²	1,4 m ²	77 W
89300004	Devidry 55, 3 m ²	2,4 m ²	132 W
89300006	Devidry 55, 4 m ²	3,4 m ²	187 W
89300008	Devidry 55, 5 m ²	4,4 m ²	242 W
89300020	Devidry 100, 1 m ²	0,4 m ²	40 W
89300022	Devidry 100, 2 m ²	1,4 m ²	140 W
89300024	Devidry 100, 3 m ²	2,4 m ²	240 W
89300026	Devidry 100, 4 m ²	3,4 m ²	340 W
89300028	Devidry 100, 5 m ²	4,4 m ²	440 W

Accessories

89300030	Devidry FM1	Filler material, 1 m ²
89300031	Devidry FM2	Filler material, 2 m ²
89300032	Devidry FM4	Filler material, 4 m ²
19911110	Devidry™ X25	Extension Cord, 25 cm
19911111	Devidry™ X100	Extension Cord, 100 cm
19911112	Devidry™ X200	Extension Cord, 200 cm
19405856	Devi tape 38 mm x 50 m	For fixing elements

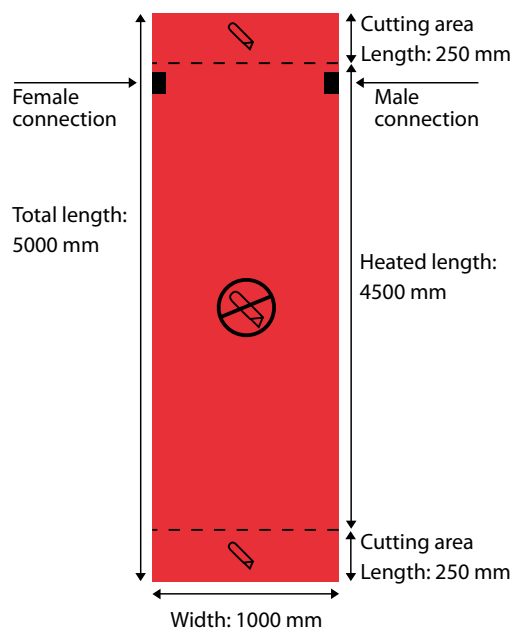

DEVI A/S

Ulvehavevej 61
DK-7100 Vejle
Tel: +45 7642 4700
Fax: +45 7642 4701
www.devi.com

DEVI ™
Member of the Danfoss Group